

316 STAINLESS STEEL FLEXIBLE HOSES

Series 601, 604, and 605


DESCRIPTION

Series 601 hoses are constructed of 1/4" I.D. teflon® lined stainless steel braid, rated for 3000 psig. The 601 hoses are fitted with 1/4" NPT brass end connections; they make excellent economical manifold pigtails.

The Series 604 hoses are constructed of double braided stainless steel, fitted with stainless steel 1/4" NPT end connections, rated for 3000 psig, and cleaned for oxygen service.

SERIES 601

- 1/4" I.D. Teflon® lined 316 stainless steel braided hose
- Rated for 3000 psig
- 601 1/4" NPT female x 1/4" NPT female
601MF 1/4" NPT male x 1/4" NPT female
- Cleaned for oxygen service.

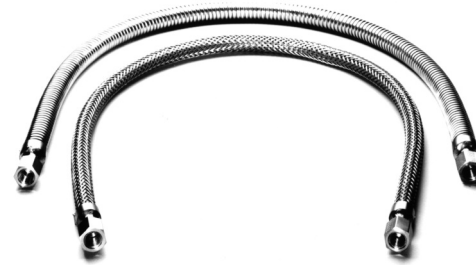

SERIES 604 AND 605

- 1/4" I.D. 316 stainless steel double braided hose (605 Series has protective outer armor to provide greater safety and kink resistance.)
- Rated for 3000 psig
- 1/4" NPT female or male stainless steel end connections
- Cleaned for oxygen service.

SPECIAL HOSES

We can provide any of the hoses on this page in different lengths and with a wide variety of end fittings.

HOW TO ORDER

Model	Length	Model	Length	Model	Length
601-2	2.0 feet	604MF-2	2.0 feet	605M-2	2.0 feet
601MF-2	2.0 feet	604-3	3.0 feet	605MF-2	2.0 feet
601-3	3.0 feet	604M-3	3.0 feet	605-3	3.0 feet
601MF-3	3.0 feet	604MF-3	3.0 feet	605M-3	3.0 feet
601-6	6.0 feet	604-6	6.0 feet	605MF-3	3.0 feet
601MF-6	6.0 feet	604M-6	6.0 feet	605-6	6.0 feet
604-2	2.0 feet	604MF-6	6.0 feet	605M-6	6.0 feet
604M-2	2.0 feet	605-2	2.0 feet	605MF-6	6.0 feet

CRYOGENIC TRANSFER HOSES – Series 607C

- 1/2" I.D. 316 stainless steel double braided hose with protective outer armor to provide greater safety and kink resistance
- Rated for 2150 psig
- 1/2" 45° flare female stainless steel connections (CGA 295) or 5/8" 45° flare (CGA 440) for oxygen
- Cleaned for oxygen service.

SPECIAL HOSES

We can provide any of the hoses on this page in different lengths and with a wide variety of end fittings.



HOW TO ORDER

Model		Length
607C-4	for nitrogen and argon	4.0 feet
607C-6	for nitrogen and argon	6.0 feet
607C-4-440	for oxygen	4.0 feet
607C-6-440	for oxygen	6.0 feet