

## **ELECTRONIC MASS FLOWMETERS Series A820**

### **DESCRIPTION**

The Series A820 electronic mass flowmeters are compact, self-contained units designed to indicate the flow rate of gases. Unlike variable area meters, flow rates are unaffected by variations in temperature and pressure within specified limits. The mechanical layout of the design includes an LCD readout built into the top of the transducer. This readout module is tiltable over 90 degrees to provide optimum reading comfort. The readout is connected by a standard modular plug, and is readily removable and extended for remote reading installations. Units are available in aluminum or stainless steel.

### **FEATURES**

- Rigid metal construction.
- Maximum operating pressure – 1000 psig.
- NIST traceable calibration certification.
- Leak integrity  $1 \times 10^{-7}$  sccm helium.
- 0-5 VDC or 4-20mA signals.
- Built-in tiltable readout display in engineering units.
- Circuit protection.
- Totalizer option available.



### **SPECIFICATIONS**


Accuracy:	$\pm 1.5\%$ of full scale, including linearity for gas temperatures of 59°F to 77°F and pressures of 5 to 60 psia
Repeatability:	$\pm 0.5\%$ of full scale
Response time:	Generally 2 seconds to within $\pm 2\%$ of actual flow
Temperature coefficient:	0.15% of full scale/°C
Pressure coefficient:	0.01% of full scale/psi
Maximum pressure drop:	0.04 to 3.23 psid depending on flow range
Gas and ambient Temp:	32° to 122°F
Output signals:	Linear 0-5 VDC (1000 ohms min load impedance) or 4-20 mA (0-250 ohms loop resistance)
Transducer input power:	12 VDC; 200 mA of maximum
Time constant:	800 ms
Materials in fluid contact:	Aluminum units: anodized aluminum, 316 SS, brass, Viton o-rings Stainless steel units: 316 SS and Viton o-rings
Attitude sensitivity:	No greater than + 15 degrees from horizontal to vertical: Standard calibration is in horizontal position.
Connections:	1/4" compression fittings
Leak integrity:	$1 \times 10^{-7}$ sccm of helium maximum to the outside environment
CE compliant:	EN 55011 class, class B: EN50082-1

Middlesex Gases & Technologies, Inc.  
292 Second Street  
PO Box 490249  
Everett, MA 02149

(800) 649-6704 or (617) 387-5050  
[www.MiddlesexGases.com](http://www.MiddlesexGases.com)  
[Info@MiddlesexGases.com](mailto:Info@MiddlesexGases.com)

**ELECTRONIC MASS FLOWMETERS CONTINUED**  
**Series A820**

(800) 649-6704 or (617) 387-5050  
www.MiddlesexGases.com  
Info@MiddlesexGases.com

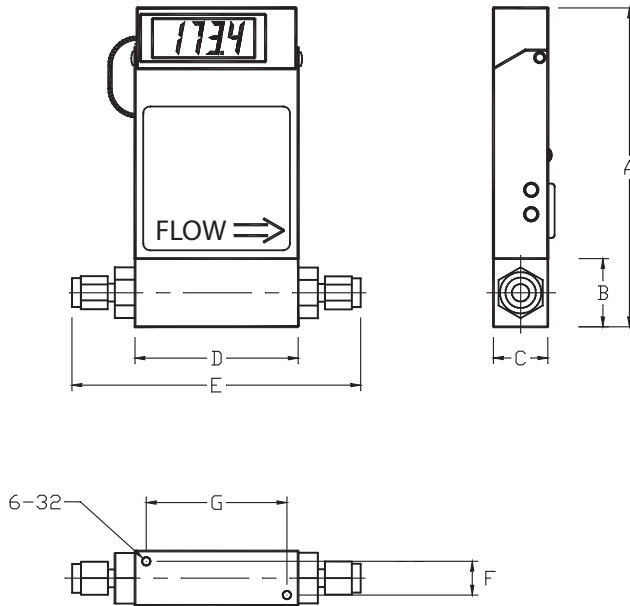

**A820 Dimensions**

	Up to 10 slpm	15 to 50 slpm
A	5.60	5.98
B	1.00	1.37
C	1.00	1.25
D	3.00	4.13
E	5.02	6.15
F	0.69	0.69
G	2.69	2.63
H	4.50	4.88

Series A820C Dimensional Drawing

**HOW TO ORDER**

**A820T-W-X-Y-Z**

(Select W, X, Y, and Z parameters from the table below. Also when ordering specify the gas, inlet pressure and operating temperature for the calibration.)

T = Totalizer (omit T if no totalizer is required)

W = material: A = aluminum  
S = stainless steel

X = Seals: V = Viton®  
B = Buna  
E = EPR  
T = Teflon®

Y = flow range:

0-10 sccm	=	00010
0-20 sccm	=	00020
0-50 sccm	=	00050
0-100 sccm	=	00100
0-200 sccm	=	00200
0-500 sccm	=	00500
0-1 slpm	=	01000
0-2 slpm	=	02000
0-5 slpm	=	05000
0-10 slpm	=	10000
0-15 slpm	=	15000
0-20 slpm	=	20000
0-30 slpm	=	30000
0-40 slpm	=	40000
0-50 slpm	=	50000

Z = Output signal: V = 0-5 VDC  
A = 4-20 mA